YESPAC™

الإتحاد الهندسى الدولى لتصنيع اللدائن

FP-15-18

Description	500 ml Rectangular Domty body and lid


Specification	Container	Lid	Tolerance
Height (mm)	62	10.5	+/- 0.5 mm
Length max top (mm)	138	140.5 mm	+/- 0.5 %
Length bottom (mm)	113.3	140.3 mm	+/- 0.5 %
Width max top (mm)	111	113.3 mm	+/- 0.5 %
Width bottom (mm)	88	113.3 mm	+/- 0.5 mm
Wall Thickness (mm)	0.60 mm	0.50	+/- 3 %
Bottom Thickness (mm)	0.65 mm	0.50	+/- 3 %
Weight (gm)	21.5	12	+/- 7 %
Brim - Full Volume (ml)	640	-	
Filling level (ml)	500	-	
Hot Filling	80 c	-	
Top Load at (Kg)	10 Kg	10 Kg	
Maximum Static Stacking level	10 Pieces	10 Pieces	
Drop Test	70 cm	70 cm	
Material	PP "Food Grade Material"	PP "Food Grade Material"	
Color	As per customer request	As per customer request	
Labeling	As per customer request	As per customer request	

Packing :


Packing type	Carton dimension	bag dimension	Container Quantity	Lid Quantity
plastic bag inside Carton box	59*39*37 cm	62*110 cm	327	980

Drawing

Tub

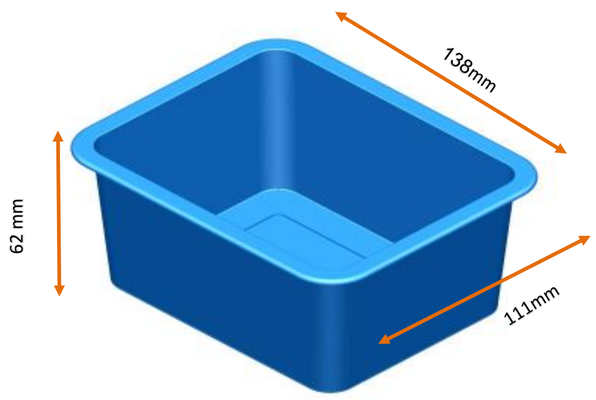

Lid

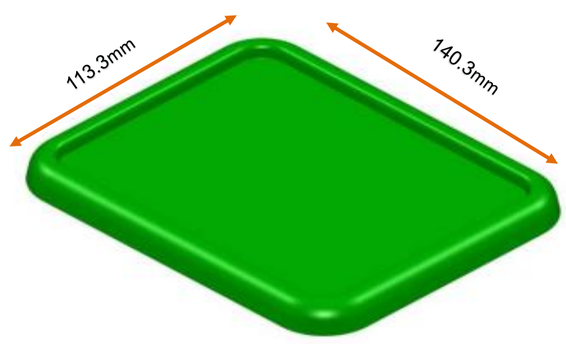

* All materials used in our products are Food Approved and recycable

*All of our products are produced under Quality and Food Safety Management Systems

INTERNATIONAL ENGINEERING UNION FOR POLYMER INDUSTRIES
Plot 181/1/A
Second Industrial Zone,
Postal code 12581,
6th October City • Egypt
Tel.: (+202) 38328070
Fax.: (+202) 38349004
E-MAIL: export@yes-pac.com / info@yes-pac.com

QA Lab

INTERNATIONAL ENGINEERING UNION (Q)
For Polymer Industries
6th of October city - 2nd industrial zone
plot no 181 / 1 - street #5